Stage Series 3" Pro White Flush Mount LED Pod

DIODE DYNAMICS



FEATURES



- Allows for flush installation on bumpers and truck beds
- Advanced TIR optics provide high efficiency and focus
- Pin-fin heatsink design, for superior thermal dissipation
- Integrated Deutsch-style connector
- Durable powdercoated aluminum construction
- Designed, torture tested and assembled in USA

GENERAL SPECIFICATIONS

Optic	Peak Beam Intensity (Candela)	llluminance (lux @10m)	Measured Output (Lumens)	Raw Output (Lumens)	Output Color
Driving	66,500 cd	665 lux	3,000 lm	5,796 lm	6000K White
Flood	3,100 cd	31 lux	3,000 lm	5,796 lm	6000K White
Fog	11,900 cd	119 lux	3,000 lm	5,796 lm	6000K White
Combo	35,100 cd	351 lux	3,000 lm	5,796 lm	6000K White
Spot	131,500 cd	1,315 lux	3,000 lm	5,796 lm	6000K White

Functions: White Output Voltage Range: 9-16V Current Draw (amps @ 12.8V): 2.7A Wattage: 36W Connector Type: Deutsch DT Connector Driver Type: Integrated Driver LED Type/Count: Cree XP-L HI/4 total Compliance Rating: J575 Durability Test, SAE-F J583, SAE-Y J581 Intrusion Rating: IP69K Waterproof, High Pressure Operating Temperature: -40°C to 85°C

What's Included:

- One (1) or Two (2) Stage Series 3" LED Pods
- One (1) or Two (2) Deutsch-style wire pigtails
- One (1) or Two (2) Flush Frame gaskets
- Mounting hardware and drilling template

Dimensions & Weight:

Length: 14.5" Width: 10" Height: 5" Weight: 2.5 lbs (single), 3.5 lbs (pair)

SKUs: Append "S" to the end of each SKU for single and "P" for pair

DD6208 Stage Series 3" Pro White Driving Flush **DD6209** Stage Series 3" Pro White Flood Flush

DD6210 Stage Series 3" Pro White Fog Flush DD6211 Stage Series 3" Pro White Spot Flush DD6720 Stage Series 3" Pro White Combo Flush


All data and specifications are nominal values and may vary.


PUBLISHED: 2-24-2021






COLORIMETRIC SPECIFICATIONS

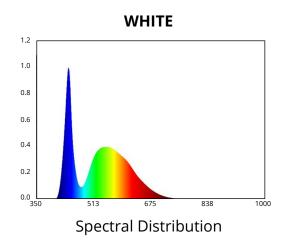




PRODUCT DIMENSIONS

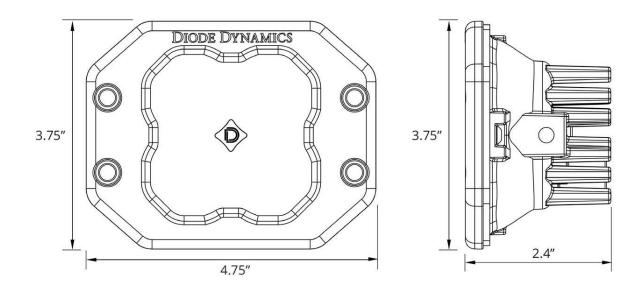

PUBLISHED: 2-24-2021


DIODE DYNAMICS

PHOTOMETRIC SPECIFICATIONS

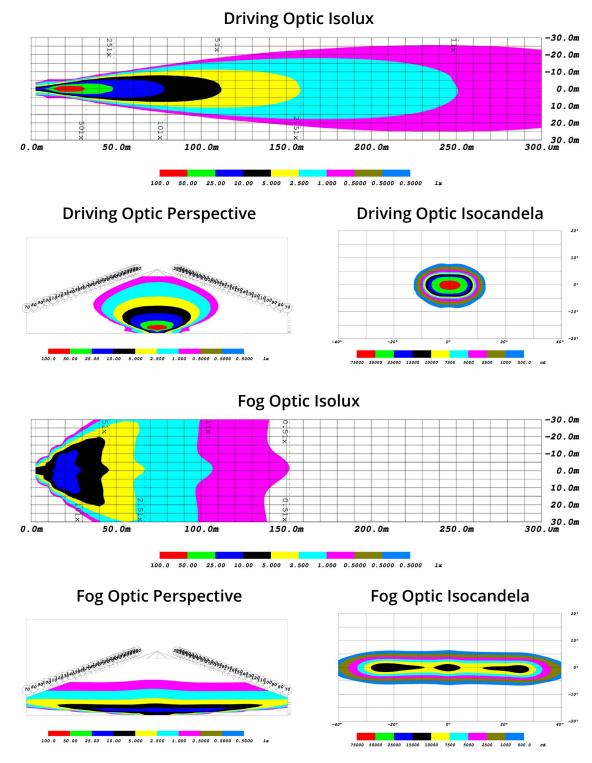

PUBLISHED: 2-24-2021


PHOTOMETRIC SPECIFICATIONS (cont.)

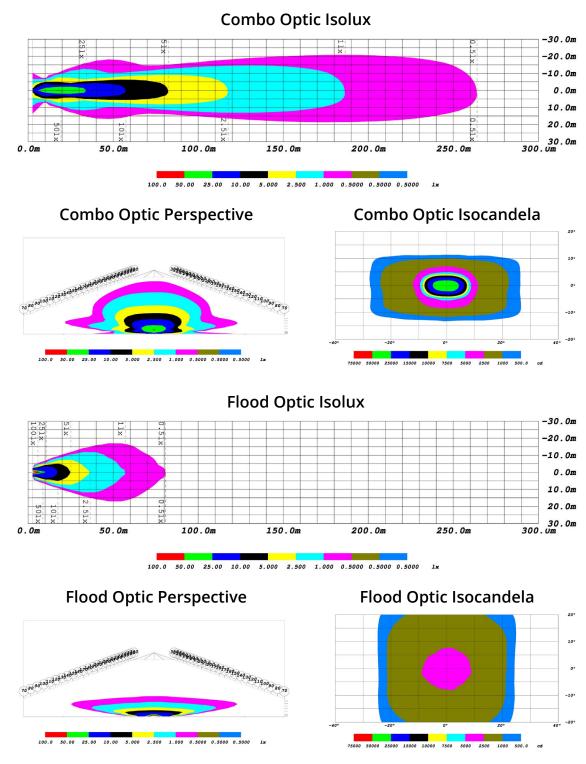

PUBLISHED: 2-24-2021


DIODE DYNAMICS

PHOTOMETRIC SPECIFICATIONS (cont.)

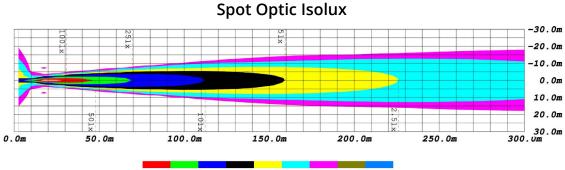


100.0 50.00 25.00 10.00 5.000 2.500 1.000 0.5000 0.5000 1x

Spot Optic Perspective

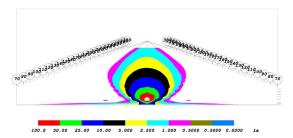

Spot Optic Isocandela

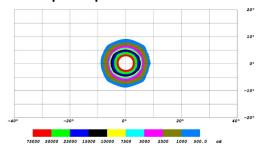

PUBLISHED: 2-24-2021