Stage Series 3" Sport White Round LED Pod







FEATURES





- Advanced TIR optics provide high efficiency and focus
- High-intensity automotive-type LEDs
- Pin-fin heatsink design, for superior thermal dissipation
- Integrated Deutsch-style connector
- Durable powdercoated aluminum construction
- · Designed, torture tested and assembled in USA

GENERAL SPECIFICATIONS

Optic	Peak Beam Intensity (Candela)	llluminance (lux @10m)	Measured Output (Lumens)	Raw Output (Lumens)	Output Color
Driving	54,700 cd	547 lux	1,520 lm	2,262 lm	6000K White
Flood	1,750 cd	18 lux	1,520 lm	2,262 lm	6000K White
Fog	10,600 cd	106 lux	1,520 lm	2,262 lm	6000K White
Spot	151,000 cd	1510 lux	1,520 lm	2,262 lm	6000K White

Functions: White Output **Voltage Range:** 9-16V

Current Draw (amps @ 12.8V): 1.1A

Wattage: 14.5W

Connector Type: Deutsch DT Connector

Driver Type: Integrated Driver

LED Type/Count: Luxeon Z ES/4 total

Compliance Rating: J575 Durability Test, SAE-F J583, SAE-Y J581

Intrusion Rating: IP69K Waterproof, High Pressure

Operating Temperature: -40°C to 85°C

What's Included:

- One (1) or Two (2) Stage Series 3" LED Pods
- One (1) or Two (2) Deutsch-style wire pigtails
- One (1) or Two (2) Mounting brackets and hardware

Dimensions & Weight:

Length: 14.5" Width: 10" Height: 5" Weight: 2.5 lbs (single), 3.5 lbs (pair)

SKUs: Append "S" to the end of each SKU for single and "P" for pair

DD6136 Stage Series 3" Sport White Driving Round **DD6137** Stage Series 3" Sport White Flood Round


DD6138 Stage Series 3" Sport White Fog Round **DD6139** Stage Series 3" Sport White Spot Round


All data and specifications are nominal values and may vary.







COLORIMETRIC SPECIFICATIONS






PRODUCT DIMENSIONS







PHOTOMETRIC SPECIFICATIONS

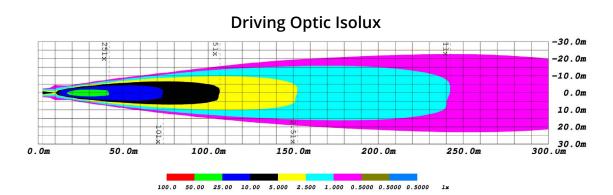


Driving Optic Perspective




Driving Optic Isocandela




Fog Optic Isolux

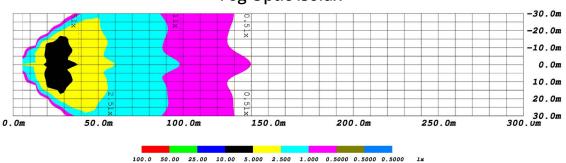

Fog Optic Perspective




Fog Optic Isocandela



PHOTOMETRIC SPECIFICATIONS (cont.)


Flood Optic Isolux

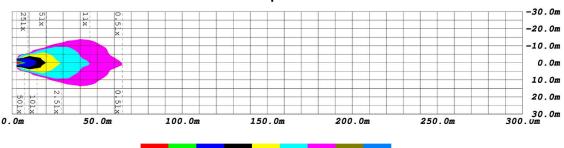


100.0 50.00 25.00 10.00 5.000 2.500 1.000 0.5000 0.5000 0.5000


Flood Optic Perspective

Flood Optic Isocandela





Spot Optic Isolux

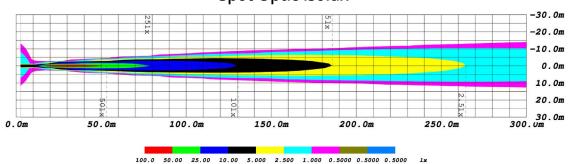

Spot Optic Perspective

100.0 50.00 25.00 10.00 5.000 2.500 1.000 0.5000 0.5000 0.5000 1x

Spot Optic Isocandela

